



Pictorial guide to removing the rear bumper

remove the nearside upper light unit to reveal bumper fixing no.1

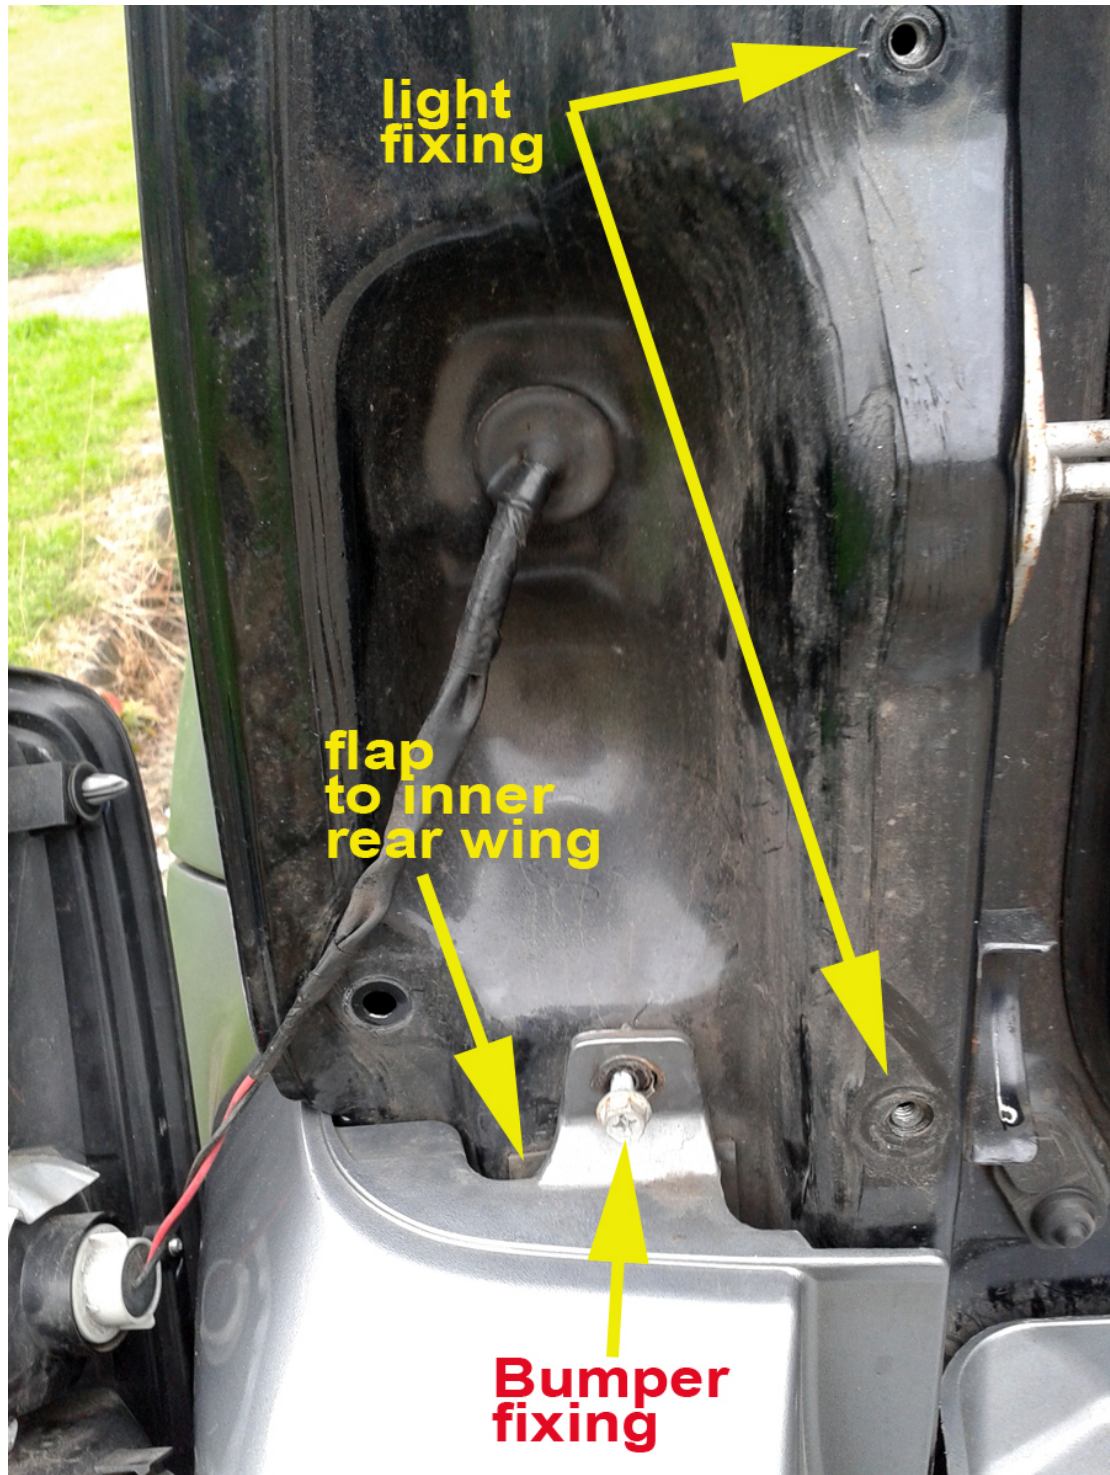

Halford – rear bumper removal


Remove the offside upper light unit to reveal bumper fixing no.2

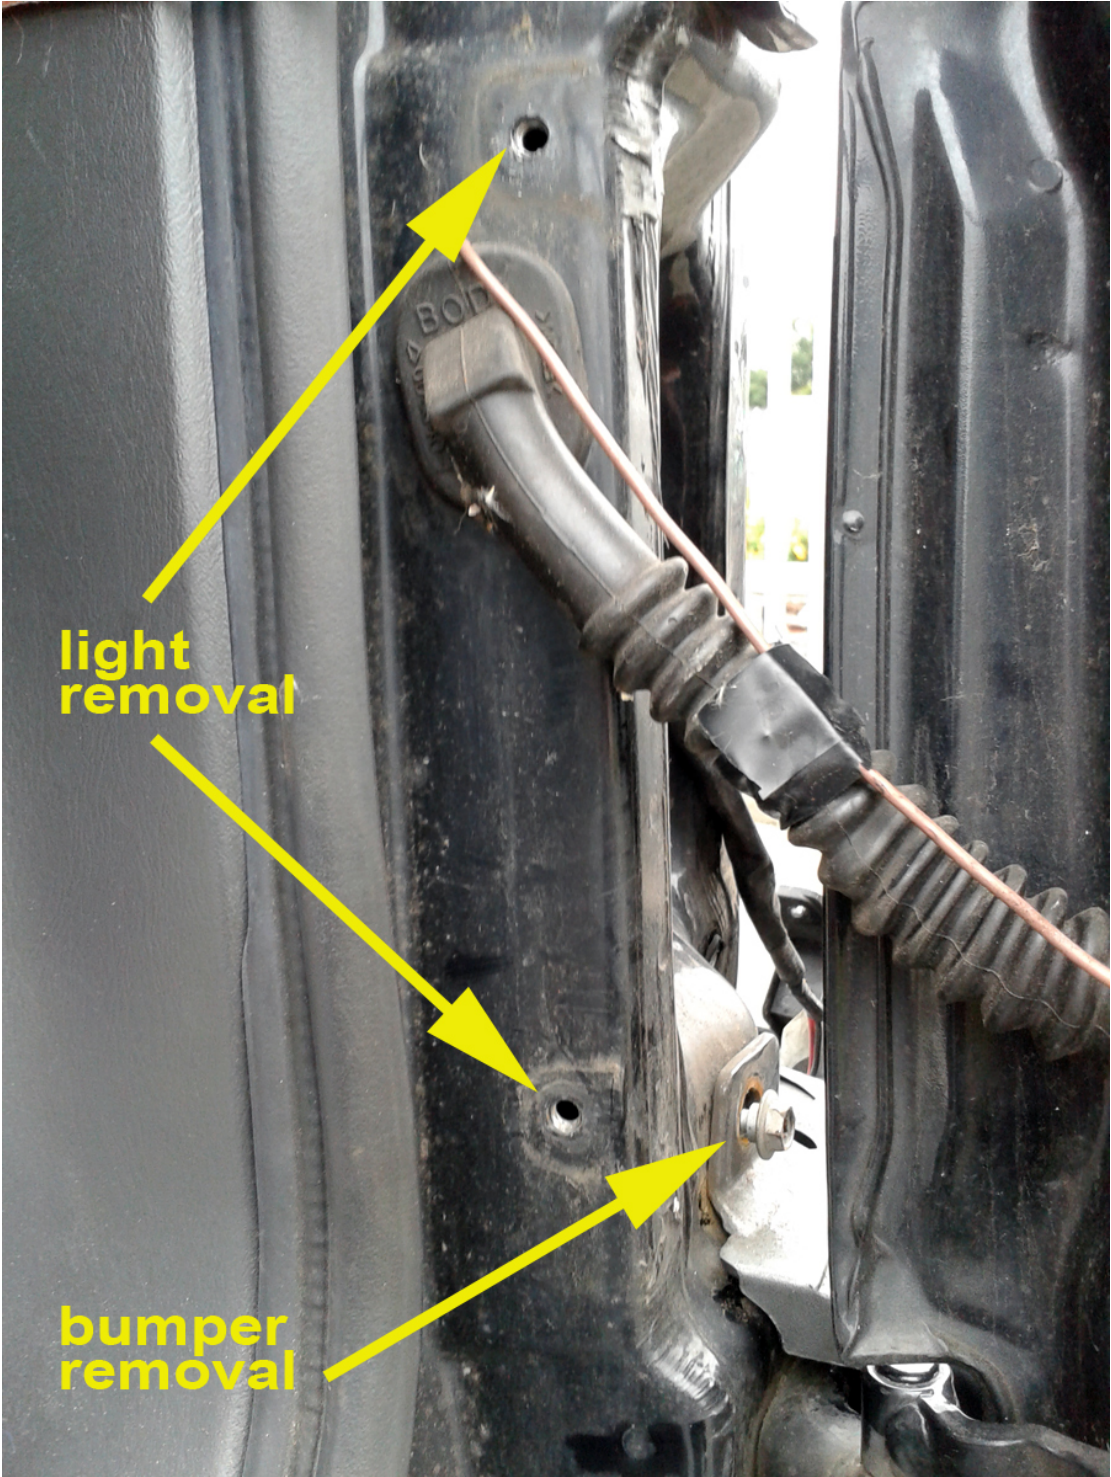

Halford – rear bumper removal


Remove the 3 screws along the top of the bumper – best using a 10mm socket rather than chewing the screw heads

Fixings 3,4 and 5

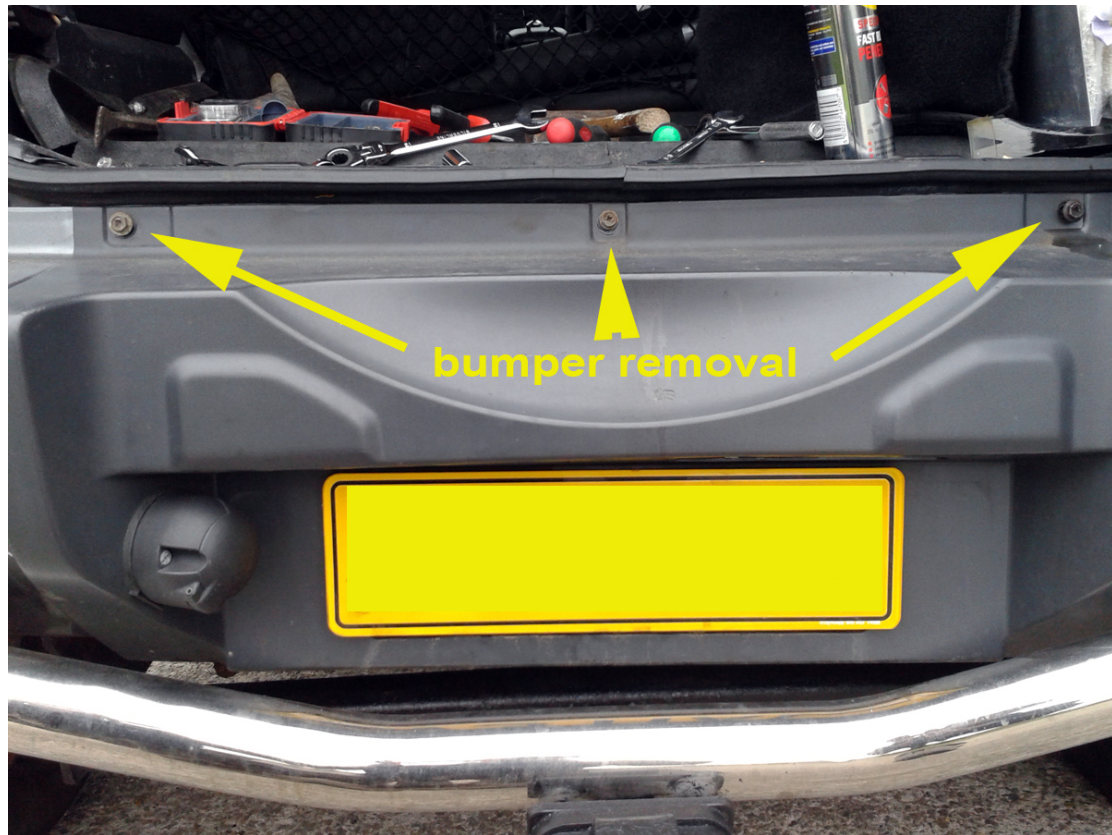


Halford – rear bumper removal

Remove the rear nearside arch fixings 6 & 7

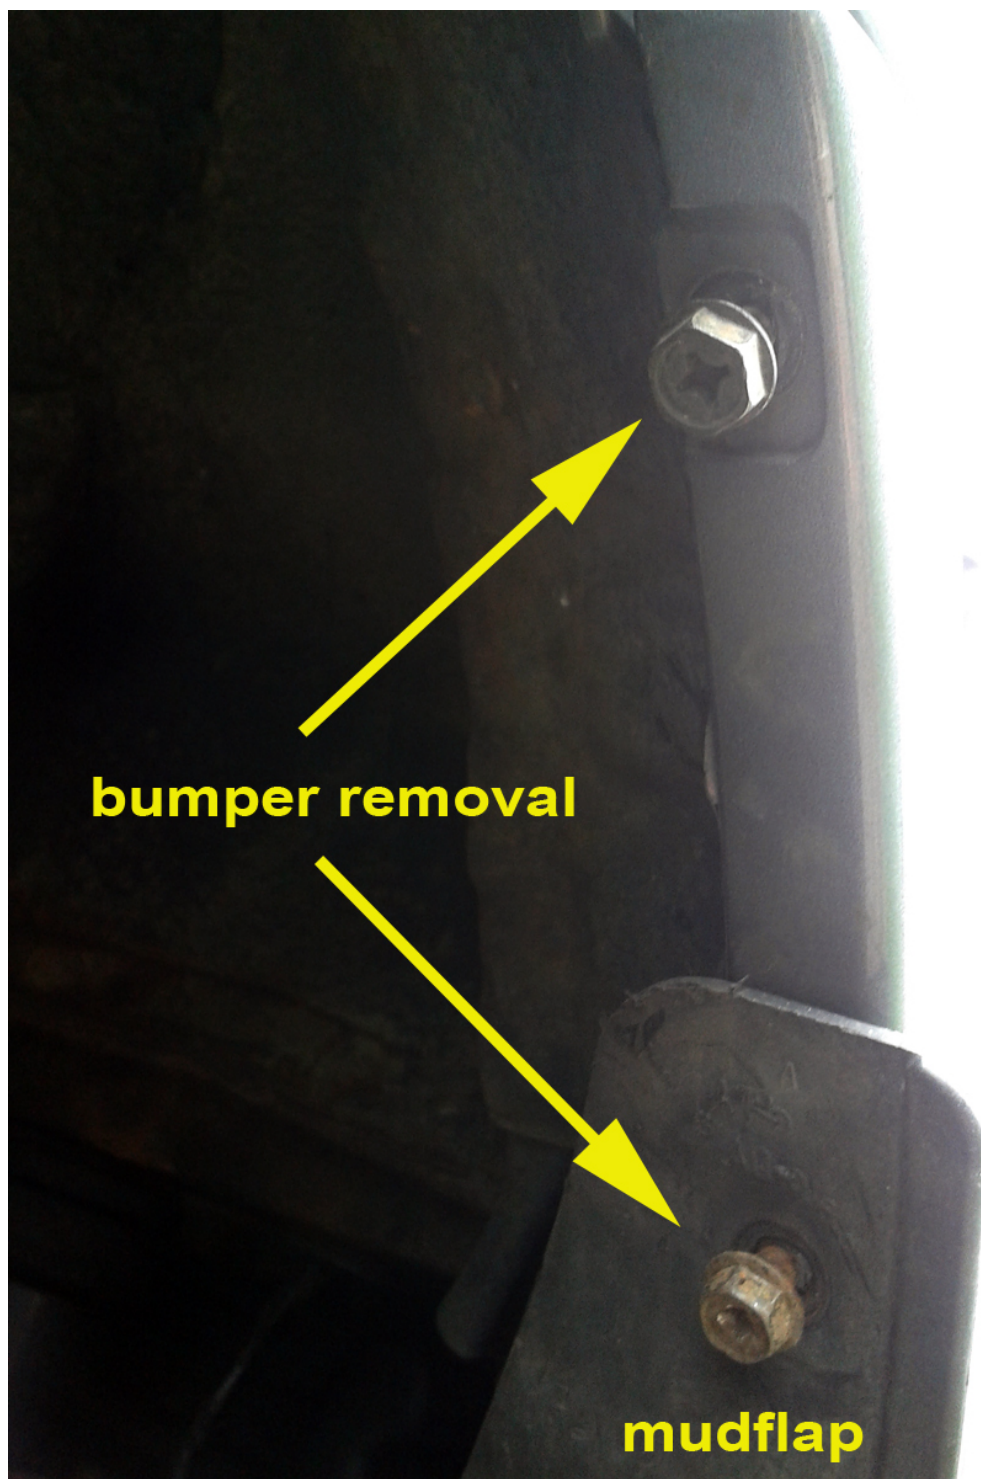

Halford – rear bumper removal

Remove the rear offside arch fixings 8 & 9

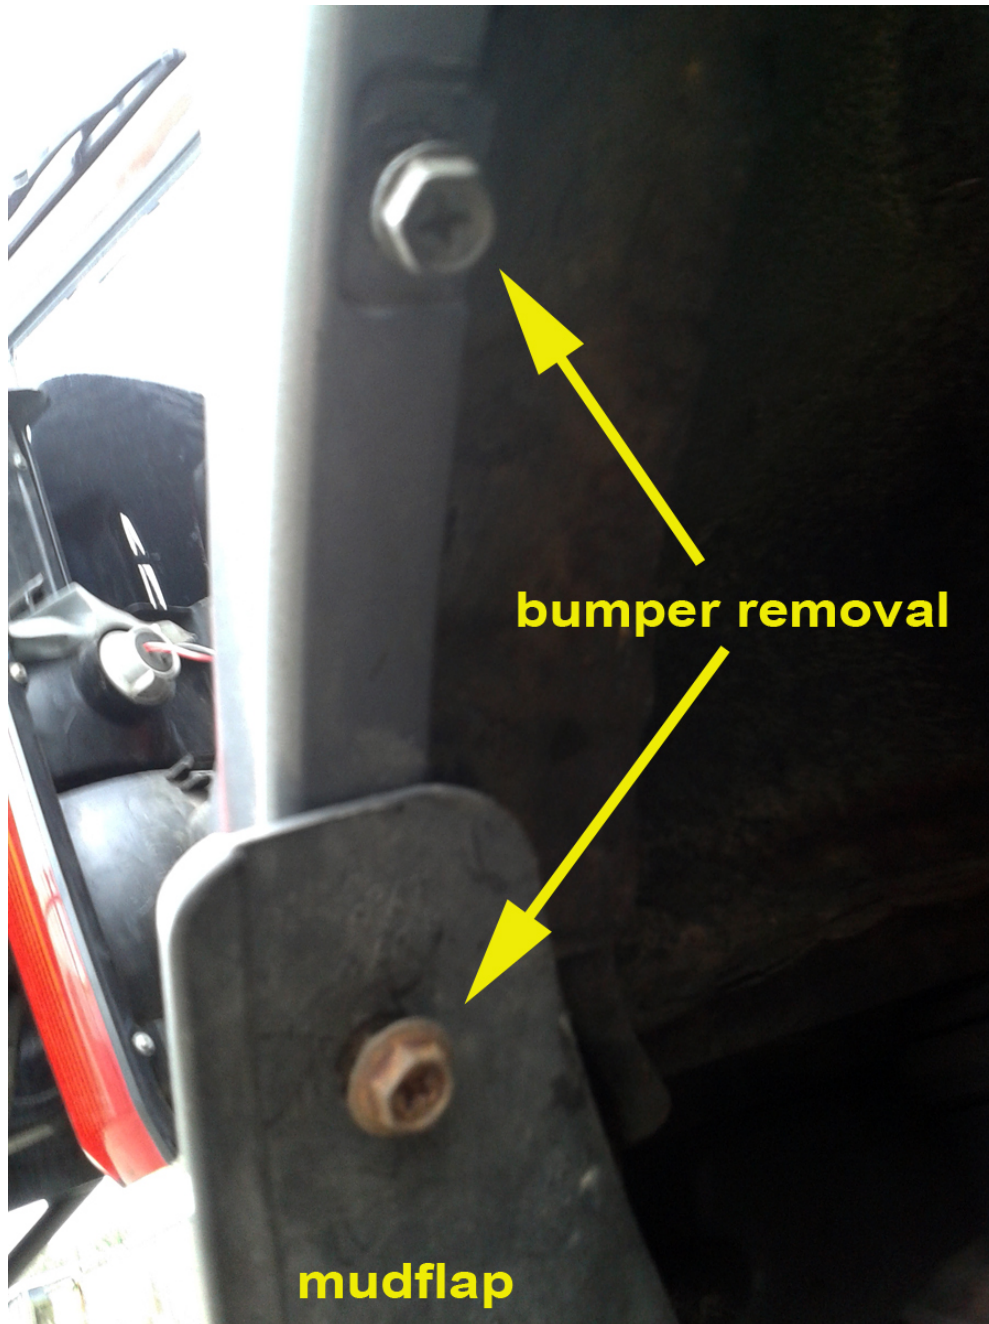

There are also x2 screws underneath the bumper either side of the number plate, but mine are already removed following the body lift as they no longer fit.

Lets call these fixings 10 & 11.

Always best to use 10mm socket rather than screwdriver, will probably need wd40 prior to commencing work, 15 min job but could take a lot longer LOL